

DC Submersible Solar Pump

Model: RS3000

Type	Description
RD030H020	DC Submersible Solar pump type: RD030H020 Rated head: 20mtr., 3.0HP, Shut off head 25 mtr., With RS3000 controller
RD030H030	DC Submersible Solar pump type: RD030H030 Rated head: 30mtr., 3.0HP, Shut off head 45 mtr., With RS3000 controller
RD030H050	DC Submersible Solar pump type: RD030H050 Rated head: 50mtr., 3.0HP, Shut off head 70 mtr., With RS3000 controller
RD030H070	DC Submersible Solar pump type: RD030H070 Rated head: 70mtr., 3.0HP, Shut off head 100 mtr., With RS3000 controller
RD030H100	DC Submersible Solar pump type: RD030H100 Rated head: 100mtr., 3.0HP, Shut off head 150 mtr., With RS3000 controller

Type	RD030H020	RD030H030	RD030H050	RD030H070	RD030H100	<div>Motor : Permanent Magnet Brushless DC Motor</div> <div>Pump : SS-304 material (In contact with water)</div> <div>Water output figures are on a clear sunny day with 3 times tracking of SPV panel, under "Average Daily Solar Radiation" condition of 7.15 KWh/sq.m on the surface of PV Array (i.e. coplanar with PV module)</div> <div>Standard Test Condition : AM=1.5, E=1000W/m² ,Cell Temperature : 25°C</div>
Rated head (mtr.)	20	30	50	70	100	
Optimum Head range (mtr.)	10-30	20-40	40-60	60-80	90-110	
Discharge (LPD)	1,35,000 [#]	1,05,000 [#]	63,000 [#]	42,000 [#]	28,500 [#]	
Shut Off head (mtr.)	25	45	70	150		
Array Rating	3000 Wp					
Input Voltage (Vmp.)	180-400V					
Input Max. Current	9 Adc					
Ambient Temperature Range	Up to 50° C					
MNRE test certificate reference (Report no.)	-					

[#] This water output is at STC conditions and testing as per MNRE's latest specifications for Solar water pumps.


Product Introduction

Rotosol solar submersible pump has a stainless steel SS-304 pump bowl and impellers which are precision laser welded. This ensures long life and high reliability against dust, sand and abrasive elements. The pump elements are driven by a sealed "Brushless DC motor" filled with oil/water. The motor is made from stainless steel 304 shell and sealed for life. Brushless DC motors has very high efficiency. The motor is driven by a controller which has inbuilt MPPT (Maximum power point tracker), dry running protection and overheating protection. A special thrust bearing supports the rotor of the motor to withstand the axial thrust of the water column when the pump is switched off.


Application

- Drinking water supply
- Livestock watering
- Pond management
- Irrigation
- Village water supply

Features and benefits

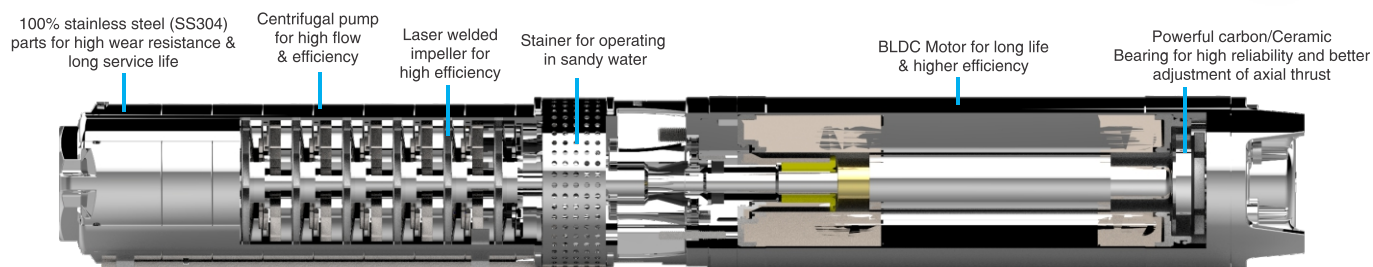


Specifications of BLDC Submersible motor:

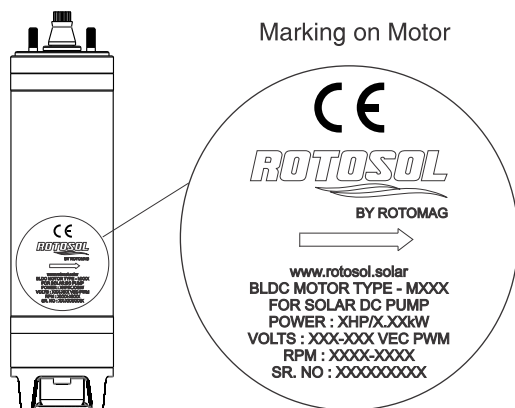

BLDC motor type	M30
Power	3HP/2.25kW
Output VEC PWM	120-290
RPM	1800-3300


► Protection : IP68

Specifications of solar pump head:

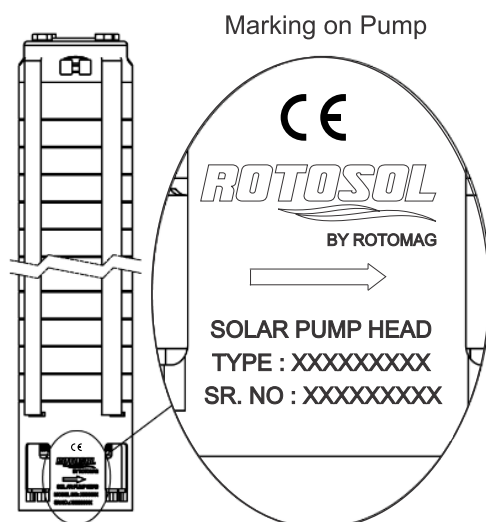

Type	Rated head (mtr.)
RD030H020	20
RD030H030	30
RD030H050	50
RD030H070	70
RD030H100	100

Dimension of DC submersible solar pump head:

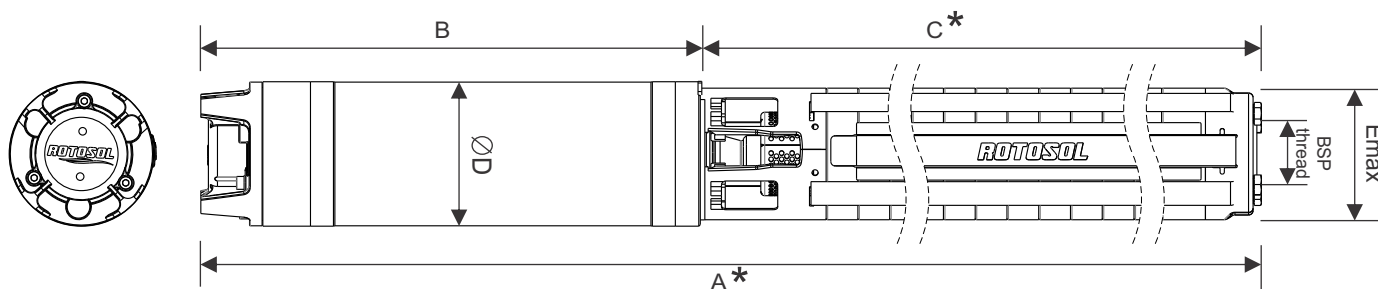

Model	Type	Dimensional Details						Module Details		Performance Curves No.	Approx. Net Weight in Kg. (± 1.5 kgs.)
		A (mm)	B (mm)	C (mm)	D (mm)	E max (mm)	BSP	Module Size (Wp)	No. of Module		
RS3000	RD030H020	835	335	500	96	126	2.5"	300	10	030H020	19
	RD030H030	835	335	500	96	126	2.5"	300	10	030H030	19
	RD030H050	940	335	605	96	92	2.0"	300	10	030H050	17
	RD030H070	945	335	610	96	92	1.5"	300	10	030H070	18
	RD030H100	945	335	610	96	92	1.5"	300	10	030H100	18

* The length is subject to change without notice as R&D is a continuous process and the modification may be required to suit the modification in I-V curves of the modules and the water output at varying heads.

Specifications of BLDC Submersible controller:

Input PV array	Input voltage (Vmp.)	Open circuit voltage (Voc)	Output VEC PWM
2400-3300 Wp	180-400 Vdc	250-450 Vdc	120-290 V

Features of Controller:

- ▶ Fully enclosed with IP54 protection. as per IS/IEC 60529:2001-08
- ▶ Multiple fault diagnosis indications.
- ▶ Integrated MPPT (Maximum Power Point Tracking).
- ▶ Option of "Tank Full" and "Source Empty" sensor for auto start and auto stop.

Protection against

Open Circuit


 Accidental Short circuit
(2 min. max.)

Reverse Polarity

Dry run



Mounting Dimensions:

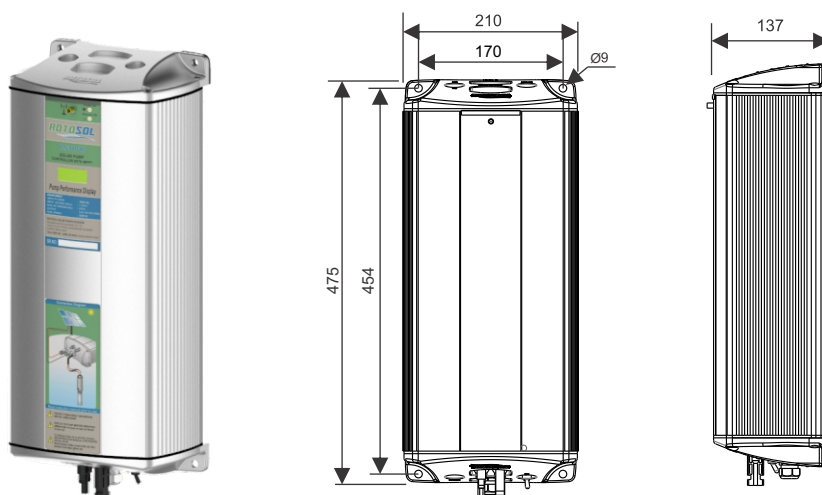

IEC certificate nos. for controller:

- ▶ I.P. test certificate RP-1718-063907

Controller Nett weight


 $6.0 \pm 1 \text{ kg.}$

Installation Requirements:

Preferred Solar PV Array:

300 Wp, 72 Cell x 10 Panels: 3000 W


Panel specifications	
Voltage at maximum power Vmax	38.88 V
Open circuit voltage Voc	44.56 V
Current at maximum power Imax	7.71 A
Short circuit current Isc	8.48 A

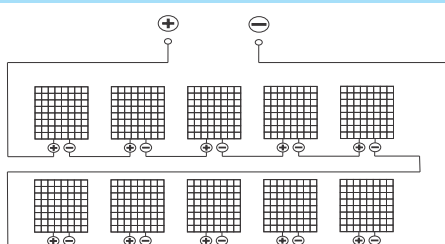

10 Series

Optional PV Array 250 Wp, 60 Cell X 12 Panels: 3000 W

Panel specifications	
Voltage at maximum power Vmax	32.40 V
Open circuit voltage Voc	38.31 V
Current at maximum power Imax	7.71 A
Short circuit current Isc	8.48 A

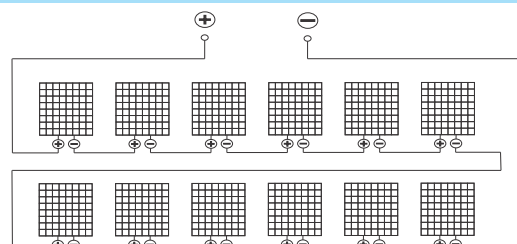


12 Series

Performance characteristics of type RD030H020 & RD030H030 (No. :- 030H020 & 030H030)

This curves show the performance range of model RS3000 series of pumps with Solar PV array.

- ▶ Ambient Temperature 50°C max.
- ▶ Based on 11 hours standard day.
- ▶ The water output is with continuous tracking, without tracking water output may reduce by 10-25% depending on angle of incidence.
- ▶ The actual output of PV array may be lower up to 30% depending on heat, dust and other losses.
- ▶ Irradiance measured on an inclined plane.

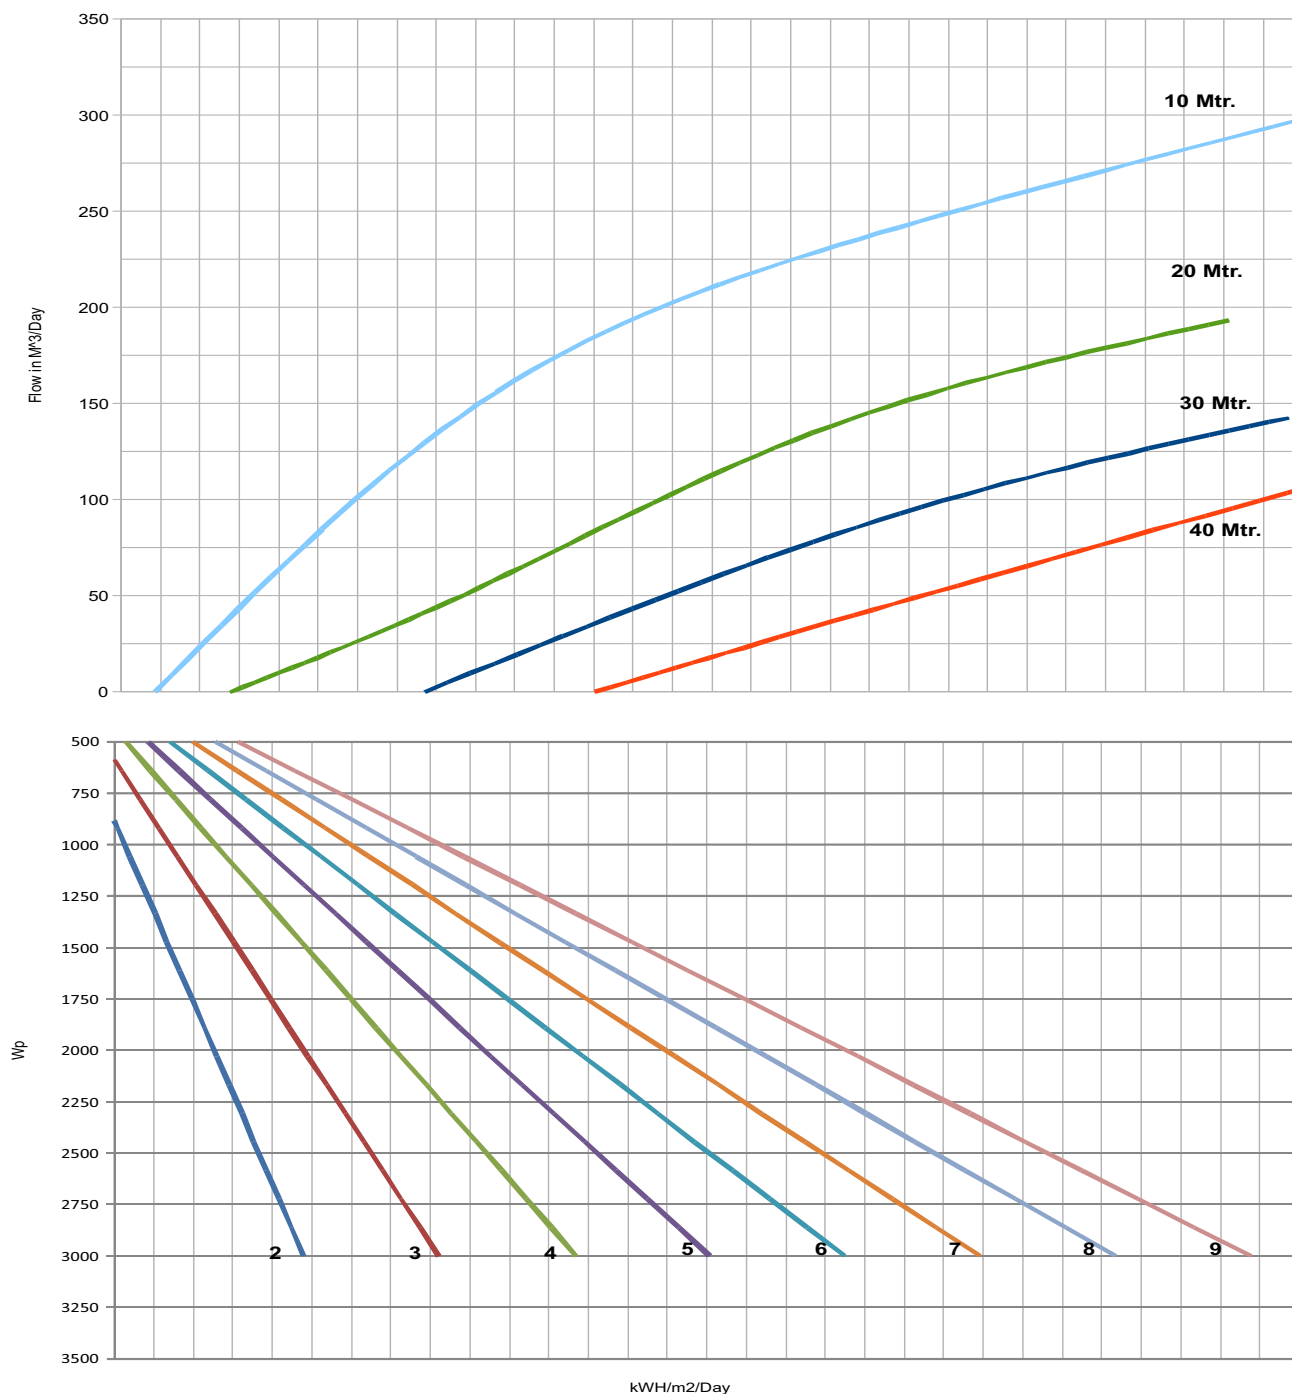


Explanation on above Charts:

An irradiation value and the required head in meters are given for a certain solar pumping system. Connect the point for the power output in Wp of the Solar array with an irradiation value, move vertical upwards to the intersection with the required head curve, then horizontal to the left to find the daily quantity of water that can be pumped (m³/day).

Performance characteristics of type RD030H050 (No. :- 030H050)

This curves show the performance range of model RS3000 series of pumps with Solar PV array.

- ▶ Ambient Temperature 50°C max.
- ▶ Based on 11 hours standard day.
- ▶ The water output is with continuous tracking, without tracking water output may reduce by 10-25% depending on angle of incidence.
- ▶ The actual output of PV array may be lower up to 30% depending on heat, dust and other losses.
- ▶ Irradiance measured on an inclined plane.

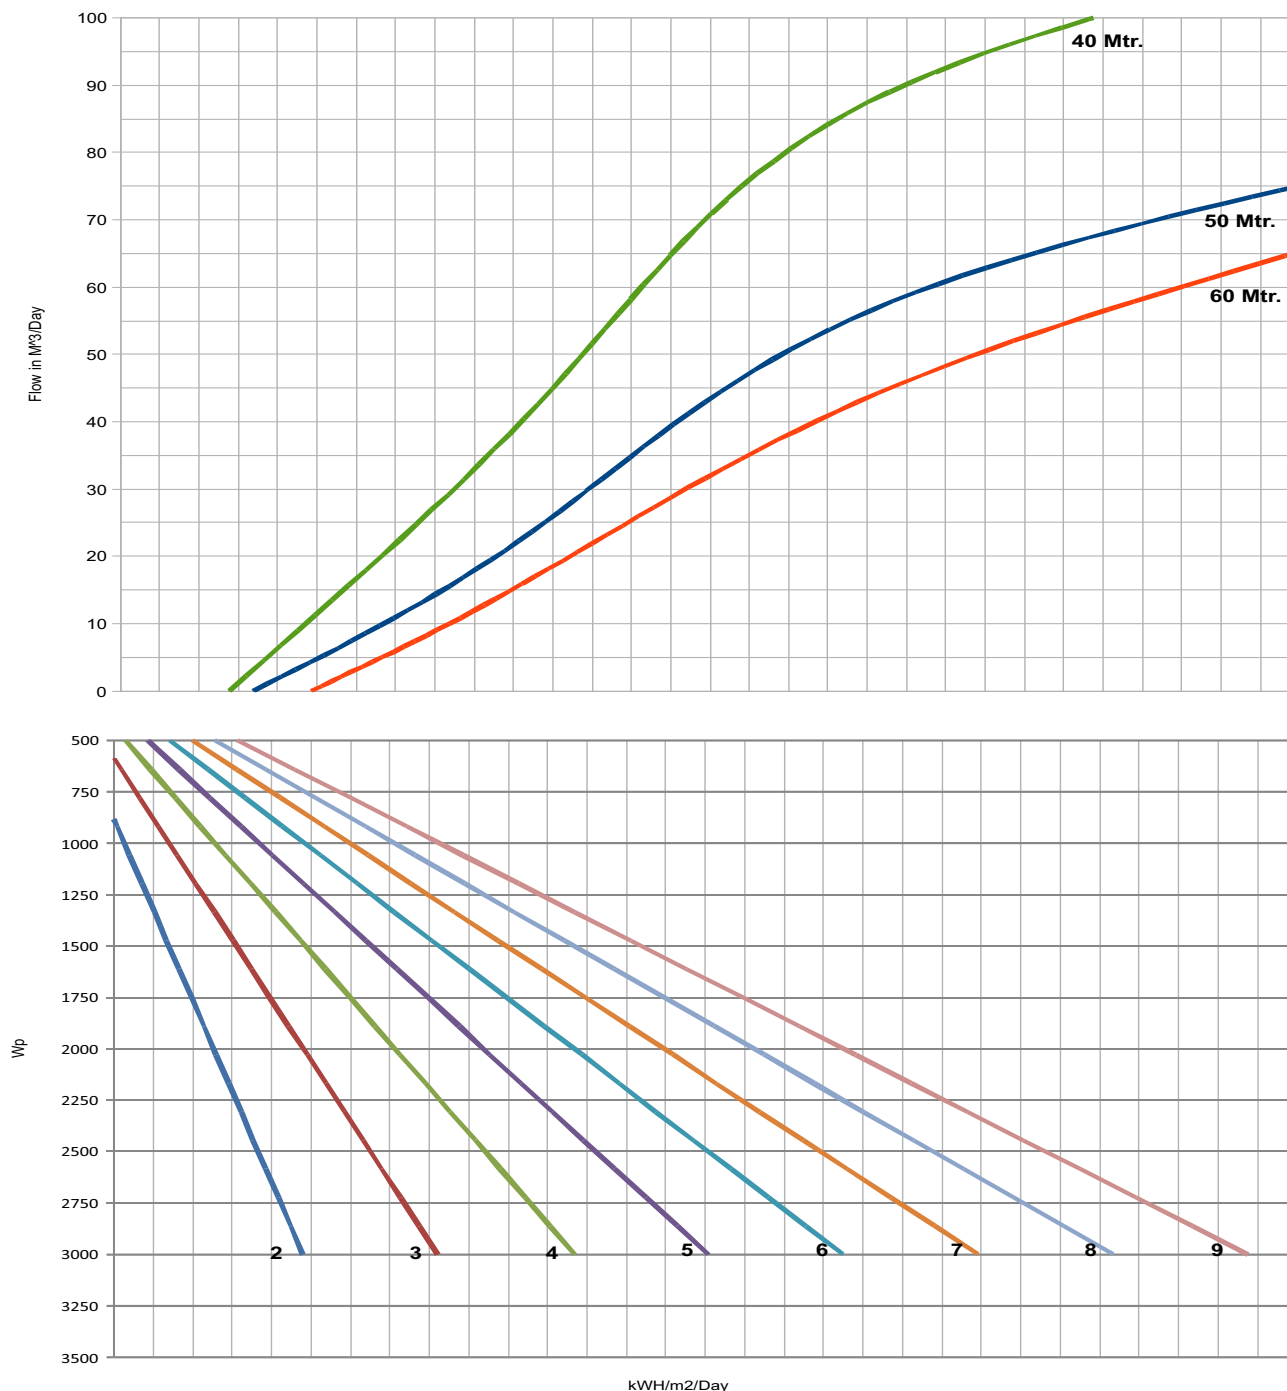


Explanation on above Charts:

An irradiation value and the required head in meters are given for a certain solar pumping system. Connect the point for the power output in Wp of the Solar array with an irradiation value, move vertical upwards to the intersection with the required head curve, then horizontal to the left to find the daily quantity of water that can be pumped (m³/day).

Performance characteristics of type RD030H070 & RD030H100 (No. :- 030H070 & 030H100)

This curves show the performance range of model RS3000 series of pumps with Solar PV array.

- ▶ Ambient Temperature 50°C max.
- ▶ Based on 11 hours standard day.
- ▶ The water output is with continuous tracking, without tracking water output may reduce by 10-25% depending on angle of incidence.
- ▶ The actual output of PV array may be lower up to 30% depending on heat, dust and other losses.
- ▶ Irradiance measured on an inclined plane.

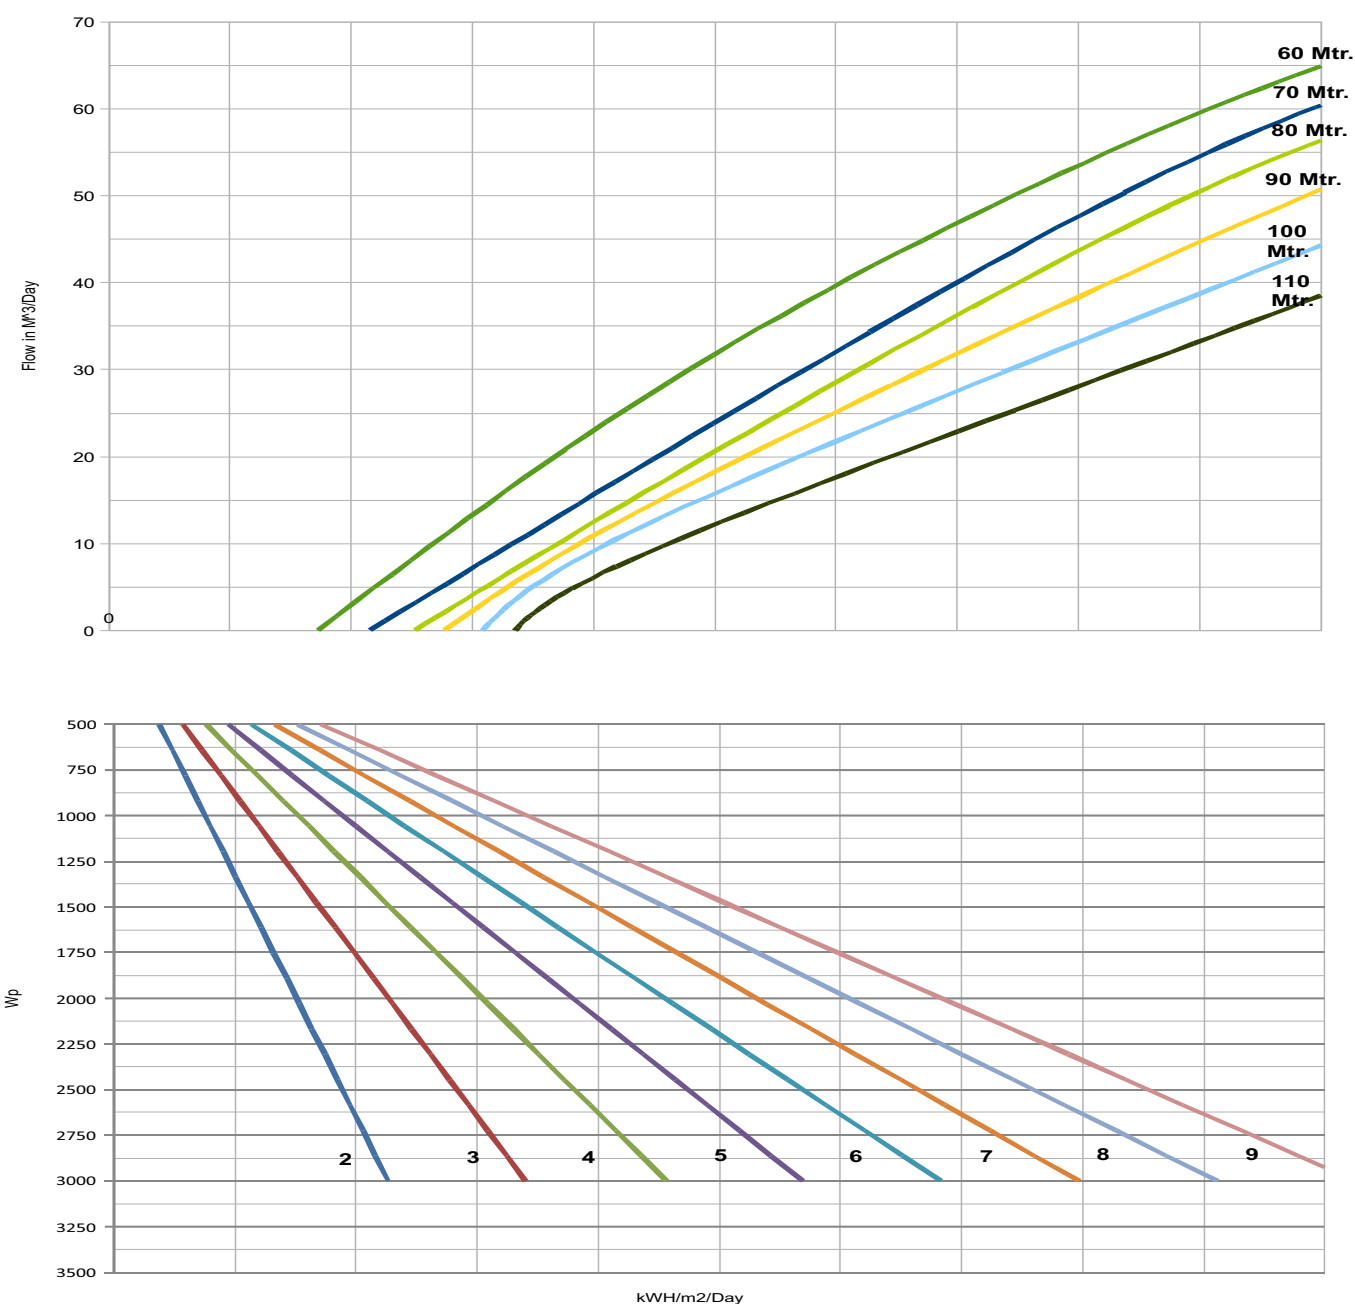

Explanation on above Charts:

An irradiation value and the required head in meters are given for a certain solar pumping system. Connect the point for the power output in Wp of the Solar array with an irradiation value, move vertical upwards to the intersection with the required head curve, then horizontal to the left to find the daily quantity of water that can be pumped (m³/day).

Pump Controller With Integrated Remote Monitoring System


Remote monitoring system has been integrated with pump controller so that actual field information about voltage, current, temperature and error conditions are available with time on desktop computer as well as on mobile application.

Description of system:

The remote monitoring system integrated with the DC solar pump controller comprises of GPRS based data transmission modem in an IP54 enclosure. SIM card and SD card are to be separately inserted for remote monitoring system to start transmitting data to our server.


The operational data including Input DC voltage, Input DC current, Power (kW), Pump on hour, Number and nature of faults are processed and summarized reports are available. The reports show pump performance and faults in daily, monthly and user configurable periods. This data is transmitted to our server accessed by individual users or corporate users using mobile device or on desktop using appropriate login credentials.

Pump Set Packing Dimensions & Weight

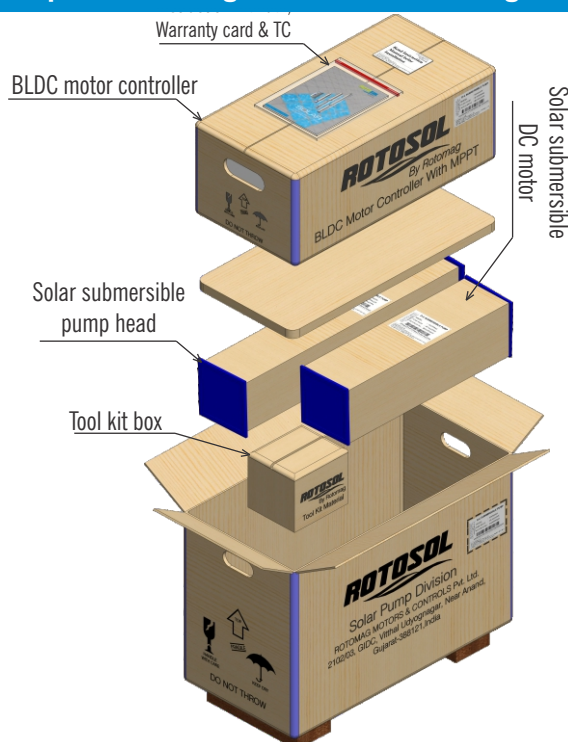


	L	W	H	
Type	L (mm)	W (mm)	H (mm)	Approx. packing weight (kgs)
RD030H020 & 030	700	350	450	27
RD030H050				25
RD030H070 & 100				24

Supplied Tool Kit Parts



Zip lock bag

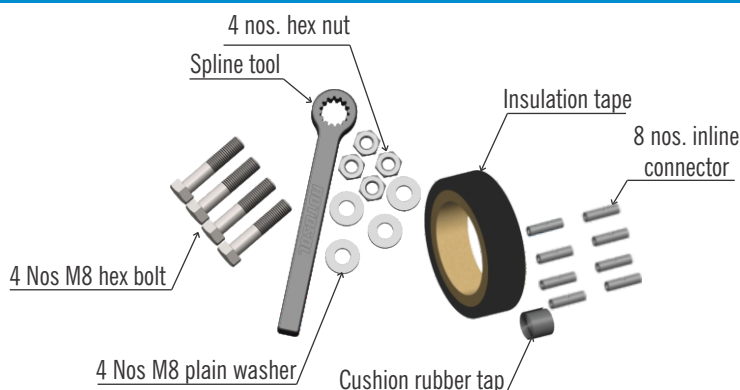

The BLDC Motor & Pump head cannot be used separately. They are uncoupled only for transportation convenience. They can be operated only if coupled together. Do not attempt to use them separately with any other device or parts, otherwise they will be damaged.

Technical specifications/details mentioned in this datasheet are subject to change without prior notice. Please contact our sales/marketing team for any updated information or any change done.

Solar Pumps Division

Rotomag Motors & Controls Pvt. Ltd.,

2102/03 GIDC Vithal Udyog Nagar, Near Anand-388 121 Gujarat Email: info@rotosol.solar • Phone : 09227110023/24/25

Rotosol is a Solar Pump Brand of Rotomag